



Universal rotary laser

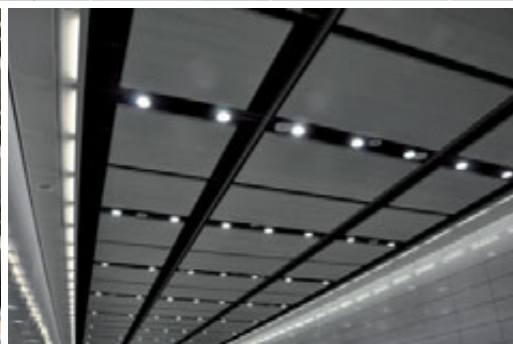

INTERIOR FINISHING AND BUILDING CONSTRUCTION

Rotary lasers have become an indispensable tool interior finishing work and building construction. Their primary use is to autonomously radiate 360° beam circles. Laserliner's modern rotary lasers are able to perform many additional diverse tasks. Their reliability and accuracy have proved themselves in practical applications, even in very unusual situations.

Powerful technology



AUTOMATIC LEVEL

Automatic alignment of the device with a magnetically dampened pendulum system. The devices are set to their initial position and align themselves automatically in a matter of seconds.



SENSOR AUTOMATIC

Electronic vials and positioning motors controlled by temperature-stable sensors for automatic alignment of devices. The devices are set to their initial position and align themselves automatically.



lock

Transport LOCK: Units with "Automatic Level" are protected with a pendulum lock during transport. A special motor lock protects units with "Sensor Automatic".



Laser 532 nm

Green looks 12 times brighter than red. This makes possible applications on dark surfaces, over long distances and working even in very bright ambient light conditions. A red laser with a wavelength of 635 nm is used as reference for the difference in brightness.



ANTI SHAKE

Additional function for all units with "Sensor Automatic": The electronic permanently levels the units even if these are moving. For quick levelling, on vibrating surfaces and windy weather.



ADS

Tilt Prevents erroneous or inaccurate measurements: Continuous monitoring of the alignment of the laser is activated 30 or 45 seconds after automatic levelling. Measurements will be suspended as a precaution if the device is disturbed unintentionally or moves due to the influence of external factors.



IP 54 IP 66 IP 67

Protection against dust and water – The measuring tools are characterised by specific protection against dust and rain.




SOFT HARD ALU

Laserliner instruments are available in sturdy carrying bags or hard-shell cases. SOFT: soft bag HARD: plastic carry case ALU: aluminium carry case



FULL 4h
FULL 7h
SpeedPowerPack – Charging time with high-quality external quick-charger



Laser reception range	red	green
SensoLite 120	120 m	120 m
SensoLite 310	300 m	200 m
SensoCommander 310	300 m	–
SensoMaster 400	300 m	–



The space grids show the laser planes and functions.
1. Horizontal levelling **4.** Slope function of one axis **6.** Plumb function
2. Vertical levelling **5.** 90° angle **7.** 90° reference function
auto: Automatic alignment **man:** Manual alignment

Interior finishing and building construction

BeamControl-Master

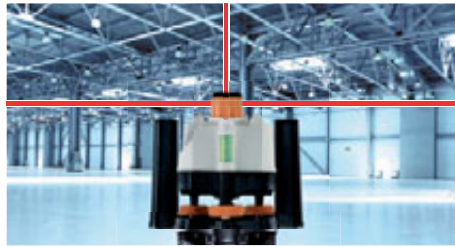

- Rotary laser with laser receiver**
- Precision 2 mm / 10 m
 - A special die-cast-zinc platform guarantees long-term stability
 - Laser modes: spot, scan, rotary and hand receiver mode
 - All functions can be controlled remotely.
 - Laser receiver range up to 120 m radius
 - **BeamControl-Master 120 set:** With tripod and levelling staff

BeamControl-Master Basic Plus 120 inclusive: BeamControl-Master, SensoCommander 120, universal mount, softbag, batteries

ORDER NO.	EAN-CODE	PU
026.03.00A	4 021563 660445	1

BeamControl-Master 120 set inclusive: BeamControl-Master, SensoCommander 120, universal mount, aluminium lightweight tripod 165 cm, flexi levelling staff 240 cm, softbag, batteries

026.04.00A	4 021563 665181	1
------------	-----------------	---

Inclusive

Laser
 635 nm

AUTOMATIC LEVEL
 lock

IP 54

5/8"

6x AA





PT



SOFT

AquaPro 120 set
NEW

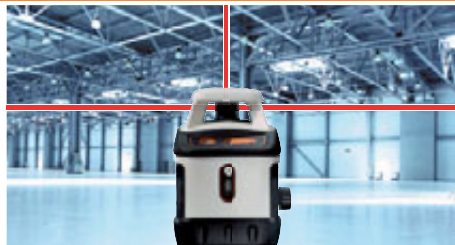

- Automatic rotary laser with laser receiver, tripod and levelling staff**
- Vertical alignment with adjustable foot
 - 3.5° self-levelling range, precision 3 mm / 10 m
 - Laser modes: rotary and hand receiver mode
 - Laser receiver range up to 120 m radius

Inclusive: AquaPro 120, SensoLite 120, universal mount, wall/floor base, aluminium lightweight tripod 165 cm, flexi levelling staff 240 cm, softbag, batteries

ORDER NO.	EAN-CODE	PU
046.04.00A	4 021563 670598	1

Inclusive

Laser
 635 nm

AUTOMATIC LEVEL
 lock

IP 54

5/8"

6x AA

6x AA





PT



SOFT

AquaPro

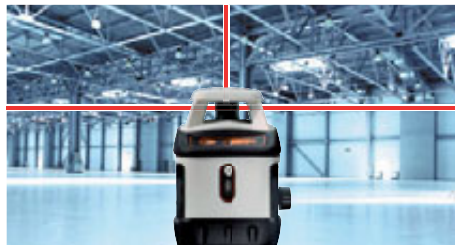

- Automatic rotary laser with rapid horizontal self-levelling**
- Vertical alignment with adjustable foot
 - 3.5° self-levelling range, precision 2 mm / 10 m
 - Laser modes: rotary and hand receiver mode
 - **AquaPro 120**
Laser receiver range up to 120 m radius
 - **AquaPro 310**
Laser receiver range up to 300 m radius

AquaPro 120 inclusive: SensoLite 120, universal mount, wall/floor base, softbag, batteries

ORDER NO.	EAN-CODE	PU
046.01.00A	4 021563 662869	1

AquaPro 310 inclusive: SensoLite 310, universal mount, wall/floor base, rechargeable batteries, charger, carrying case, batteries

046.02.00A	4 021563 663835	1
------------	-----------------	---

Laser
 635 nm

AUTOMATIC LEVEL
 lock

IP 54

5/8"

6x AA

6x AA

FULL
 7h

SOFT

HARD



PT



IQ