


Slope indicators



Digital spirit levels

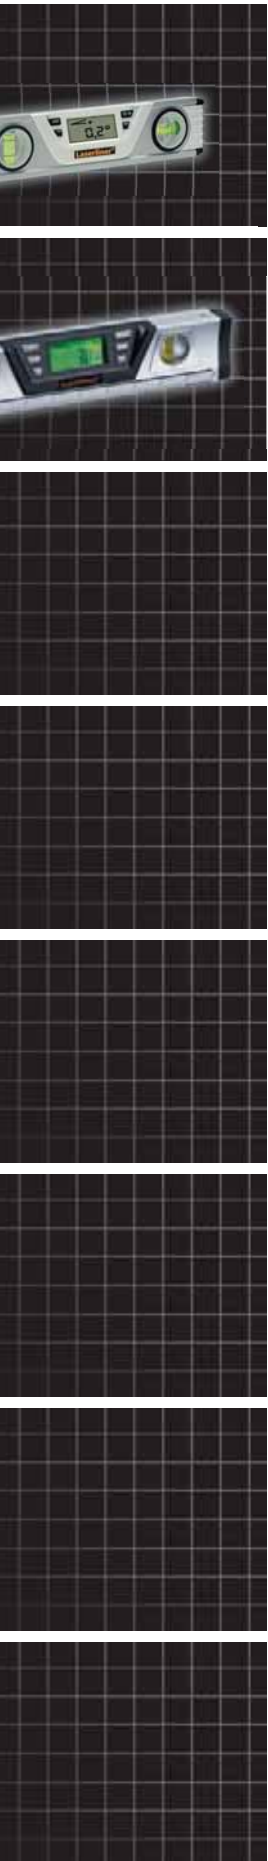

DigiLevel



Digital electronic spirit level with vertical and horizontal angle display

- An acoustic signal is sounded at 0°, 45°, 90°, 135° and 180° as an aid to ease the alignment of objects.
- Angles can be transferred in reference mode.
- Powerful adhesion magnets and additional vertical and horizontal vial, illuminated display
- Accuracy of electronic measurements: ± 0.1° at 0° and 90°, ± 0.2° from 1° ... 89°, vial precision ± 0.5 mm / m
- Slope in degrees, in/ft, or percent



Inclusive: DigiLevel, softbag, batteries

DigiLevel Compact





Length 23 cm

ORDER NO.	EAN-CODE	PU
081.202A	4 021563 663019	5

DigiLevel 60

Milled measuring surface 60 cm in length, call-up of up to 9 values with the separate measurement memory

081.200A	4 021563 662302	5
----------	-----------------	---

PT

DigiLevel Laser



Digital electronic spirit level with wallline-laser, vertical and horizontal angledisplay

- An acoustic signal is sounded at 0°, 45°, 90°, 135° and 180° as an aid to ease the alignment of objects.
- Angles can be transferred in reference mode.
- Recall of up to 9 values with the separate measurement memory
- Milled measuring surface 60 cm in length, powerful adhesion magnets and additional vertical and horizontal vial, illuminated display
- Accuracy of electronic measurements: ± 0.1° at 0° and 90°, ± 0.2° from 1° ... 89°, vial precision ± 0.5 mm / m
- Slope in degrees, in/ft, or percent



Inclusive: DigiLevel Laser, softbag, batteries

ORDER NO.	EAN-CODE	PU
081.201A	4 021563 663156	5








PT

Digital spirit levels and angle gauges




DigiLevel Pro



Digital electronic level with spot laser as an optical extension for point-precise assessment of height and angle

Inclusive: DigiLevel Pro, softbag, batteries

- An acoustic signal is sounded at 0°, 45°, 90°, 135° and 180° as an aid to ease the alignment of objects.
- The flip-display feature changes the display automatically when making overhead measurements
- Calibration function for increased accuracy and adaptation to the measuring surface
- Powerful adhesion magnets on the underside
- Accuracy of electronic measurements: ± 0.05° at 0° ... 1°, ± 0.1° and 90°, ± 0.2° from 1° ... 89°, vial precision ± 0.5 mm / m



DigiLevel Pro

ORDER NO.	EAN-CODE	PU
30cm: 081.212A	4 021563 664856	5
60cm: 081.210A	4 021563 664825	5
120cm: 081.216A	4 021563 664849	2



Laser 635 nm
 2 magnetic
 AutoSound
 1/4"
 2x AAA

