

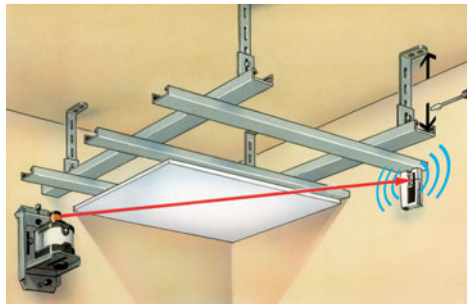


## AquaPro 210

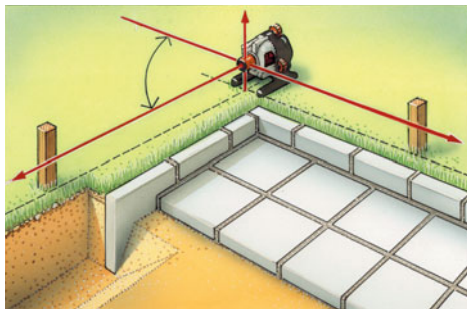

Robust rotary laser with automatic horizontal self-levelling.

Rev. 0808

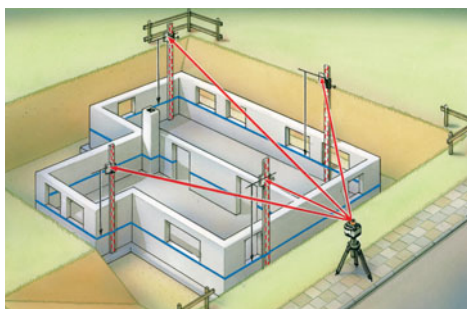

- Robust housing with **protective rubber casing**
- **Automatic level:** Automatic rotary laser with horizontal self-levelling by means of magnetically damped pendulum system; vertical alignment with adjustable foot.
- A **vertical reference beam** is provided to plumb and align partition walls.
- **Tilt function:** The unit uses visual and audible signals to indicate when it is outside its tolerance range.
- **Slanting levels** can be set using the tilt function, which can be switched off.
- The **wall/floor console** can be vertically levelled or the unit can be attached to the wall.
- The **Sensolite 210** features LC displays on the front and rear sides. Powerful adhesion magnets enable attachment to magnetic objects.
- **SpotLite marking function:** Prevents parallax errors and facilitates precise marking of reference levels.
- **Transport lock:** A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

### TECHNICAL DATA

<b>ACCURACY</b> 2 mm / 10 m
<b>SELF-LEVELLING RANGE</b> ± 3,5°
<b>LEVELLING</b> Automatic horizontal / vertical with adjustable foot
<b>LASER RECEPTION RANGE</b> <b>max. 200 m radius</b>
<b>LASER WAVELENGTH</b> 635 nm
<b>LASER</b> class 2, < 1 mW
<b>POWER SUPPLY</b> 6 x type AA, for about 45 operating hours
<b>WATER AND DUST PROTECTION</b> IP 54
<b>WEIGHT</b> 1,7 kg
<b>DIMENSIONS</b> 120 x 160 x 140 (W x H x D)
<b>AUTOMATIC LEVEL</b> <b>lock</b> <b>Spotlite Marking</b>




**Article-No: 046.02.00A**

EAN-Code: 4 021563 663835

- Aqua Pro 210**  
including carrying case  
+ laser receiver Sensolite 210  
+ universal mount  
+ wall/floor console  
+ power adapter / charger  
+ high-performance batteries  
+ batteries


**PU 1**

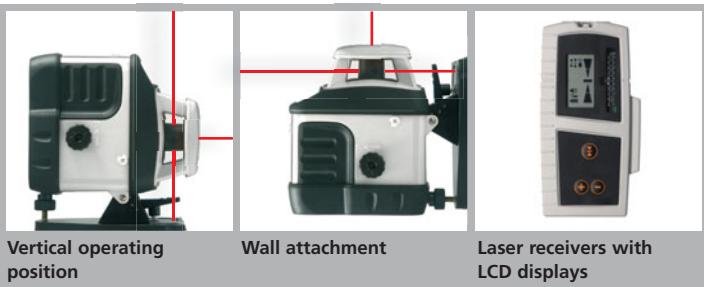

Vertical operating position

Wall attachment

Laser receivers with LCD displays



### OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN-CODE	PU
Flexi Levelling Staff 240 cm	080.50	4 011879 631147	1
Crank Tripod 160 cm	080.30	4 011879 630959	1