


AutoSmart-Laser Basic-Plus 100




Automatic rotary laser
with laser receiver

Rev.0212

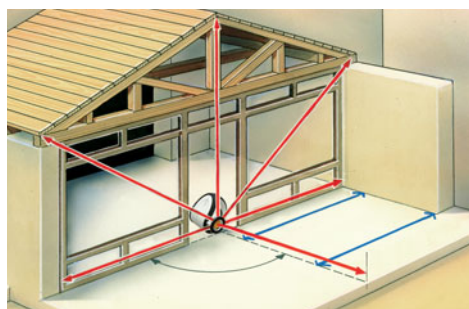


AutoSmart-Laser

- **Sensor Automatic:** fully automatic alignment via electronic positioning motors controlled by temperature-stable sensors.
- A **vertical reference beam** is provided to plumb and align partition walls.
- **Out-of-level:** The device emits visual signals to indicate that it is out of the levelling range.
- **Transport Lock:** a special motor lock protects the unit during the transport.

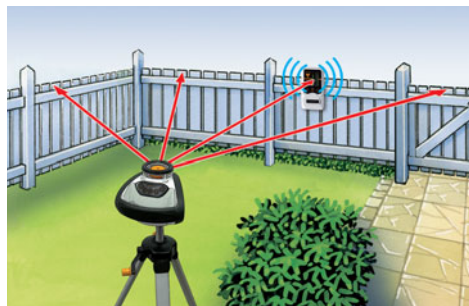

SensoLite 100

- Laser receiver with head magnet.
- Max. laser reception range 100 m radius.
- High-luminosity LEDs and melodies indicate the level of the laser beam.
- Incl. universal mount.

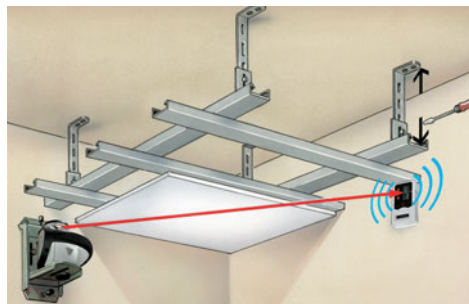


Sensor-Automatic



Vertical operating position



Compact laser receiver



ARTICLE	ARTICLE NO	EAN CODE	PU
AutoSmart-Laser Basic-Plus 100	055.03.00A	4 021563 682836	1



TECHNICAL DATA	
ACCURACY	± 4 mm auf 10 m
SELF-LEVELLING RANGE	± 4°
LEVELLING	horizontal and vertical automatic
LASER RECEPTION RANGE	max. 100 m radius
LASER MODES	spot, scan, rotary and hand receiver mode
LASER WAVELENGTH	635 nm
LASER	class 2, < 1 mW
POWER SUPPLY	4 x type AA, for about 12 operating hours
WEIGHT	(complete set) 1,85 kg
DIMENSIONS (W x H x D)	155 x 130 x 150 mm



AutoSmart-Laser Basic-Plus 100

- inclusive AutoSmart-Laser
- + SensoLite 100
- + universal mount
- + softbag
- + batteries

Packing dimension (W x H x D)
300 x 215 x 190 mm