




# Laserliner®

## AutoCross-Laser 4C PowerBright






Robust cross-line laser with 4 super-bright laser lines, plumb laser and impact-proof housing cover.

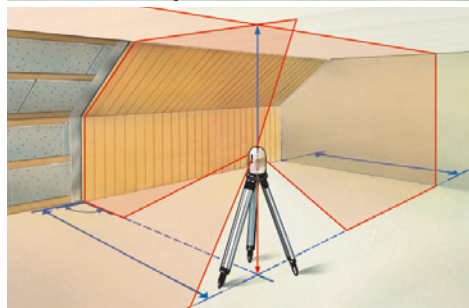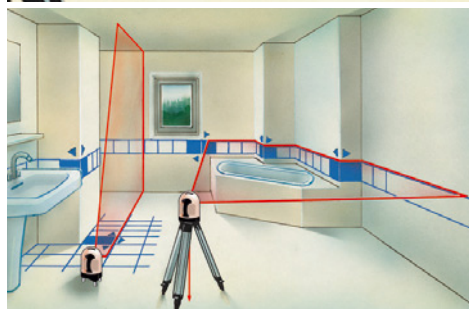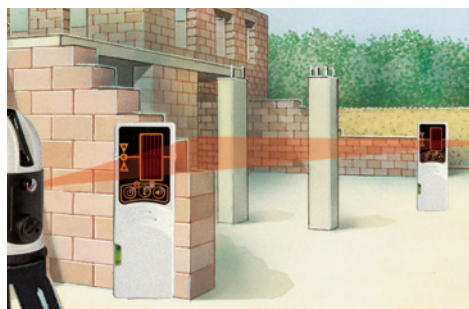Rev. 0209



- **PowerBright-Laser:** Special high power diodes produce laser lines double as bright as usual.
- Robust design thanks to the **impact-proof housing cover**.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- The **3 vertical lines** are aligned at right angles to one another.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Individually switchable** laser lines.
- **Out-Off-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX 51 up to a max. of 50 m radius – ideal for all interior and exterior applications.
- The pivoted housing can be turned with a **vernier adjustment mechanism** to permit exact positioning of laser lines.
- **Illuminated spirit level** and **height-adjustable feet** for preliminary adjustment of the unit.
- **Mains operation** possible using additional mains unit.
- **Removable rubber caps.**
- **Transport lock:** A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

### TECHNICAL DATA

<b>ACCURACY</b> 2 mm per 10 m
<b>SELF-LEVELLING RANGE</b> ± 3°
<b>LEVELLING</b> automatic
<b>LASER RECEPTION RANGE</b> max. 50 m radius
<b>LASER WAVELENGTH</b> 635 nm
<b>LASER</b> line lasers, class 2M, < 5 mW plumb laser, class 2, < 1 mW
<b>POWER SUPPLY</b> batteries / mains operation
<b>WEIGHT</b> 1.6 kg
<b>DIMENSIONS</b> 120 x 195 x 130 mm (WxHxD)
 <b>AUTOMATIC LEVEL</b> 




**Article-No: 031.312A**  
EAN-Code: 4 021563 668403


**AutoCross-Laser 4C PowerBright**  
including carrying case  
+ tripod adapter  
+ PowerPack Fast  
+ batteries

PU 1

**Article-No: 031.311A**  
EAN-Code: 4 021563 667079

**AutoCross-Laser 4C PowerBright RX**  
Set content like above  
including RangeXtender RX  
+ universal mount


PU 1



Stable metal base with vernier adjustment




Vial for pre-adjustment



High-quality external Quick-Charger

1H 3V 1D



### OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN-CODE	PU
Flexi Levelling Staff 240 cm	080.50	4 011879 631147	1
Telescopic Stand Basic, 330 cm	090.120A	4 021563 650637	1