


Laserliner®

SuperSquare-Laser





90° line laser – ideal for laying floor tiles.

Rev. 1008

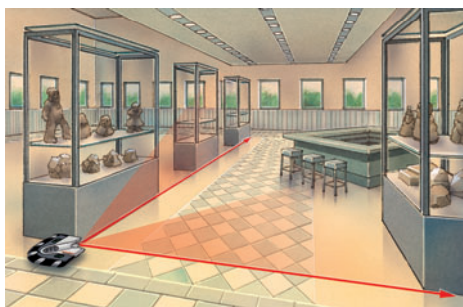

- The **2 highly visible laser lines** are ideally suited to floor alignment.
- **Illuminated vials** for vertical levelling on walls.
- With **robust 90° metal lay edge** for easy alignment of first floor tile.
- Built-in levelling feet
- 1/4" tripod connection

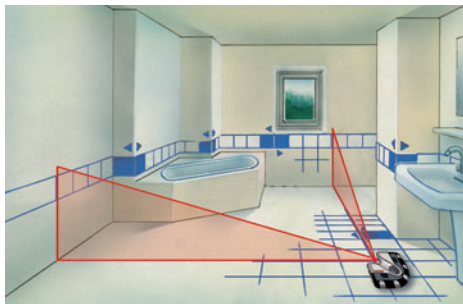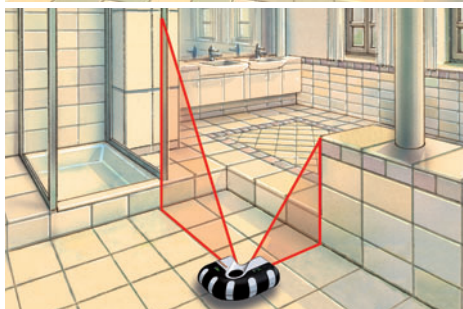


Vials for wall applications



With robust 90° metal lay edge and built-in levelling feet

TECHNICAL DATA

ANGLE PRECISION of laser lines: + 0,05°
ACCURACY of vertical laser lines: + 0,5 mm / 1 m
OPERATING RANGE (depending on brightness of area) 20 m
WORKING TEMPERATURE 0°C ... + 50°C
STORAGE TEMPERATURE -10°C ... + 70°C
LASER WAVELENGTH 635 nm
LASER line lasers, class 2M, < 5 mW
POWER SUPPLY / OPERATING TIME 2 x 1,5V AA / 24 h
WEIGHT 0.4 kg
 Laser 635 nm



Articel-No: 081.130A

EAN-Code: 4 021563 662760

SuperSquare-Laser

including carrying case
+ Laser enhancement glasses
+ batteries

PU 5