

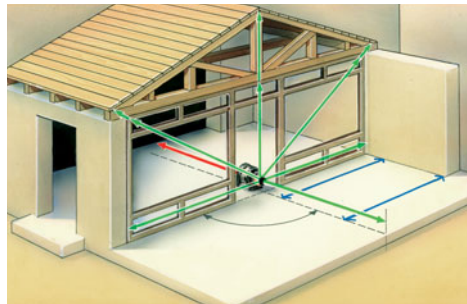


Quadrum Green

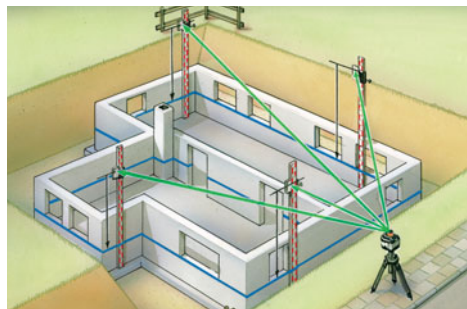

Fully automatic rotary lasers with an extremely durable design. With green laser technology.

Rev.0210

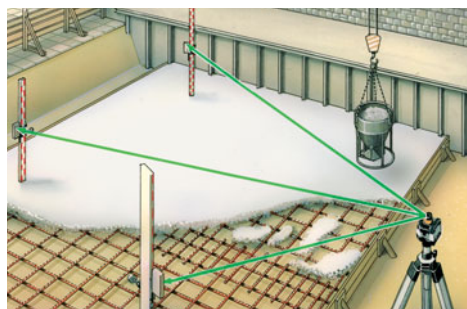

- **Green laser technology:** because of the physiology of the human eye, green lasers are more visible than red lasers by an order of magnitudes. This makes these lasers easily visible over longer distances and in bright ambient light.
- Robust **waterproof** housing.
- **Sensor Automatic:** fully automatic alignment via electronic positioning motors controlled by temperature-stable sensors.
- **ADS tilt:** automatic shutoff by ADS (Anti-drift system) when there is an external disturbance.
- The **green reference beam** can be used to plumb and align partition walls.
- The additional **red reference beam** makes it easier to plumb and align partition walls.
- A **manual slope mode** permits the layout of gradients up to 5 °.
- All of the rotary laser's functions can be controlled with the **remote control** unit.
- The **4 IR receiving diodes** allow this instrument to be remotely operated from all sides.
- **Transport Lock:** a special motor lock protects the unit during the transport.
- **High-performance laser receivers** are available as options.
- **Integrated safe-operating concept.**

TECHNICAL DATA

ACCURACY ± 1 mm / 10 m
SELF-LEVELLING RANGE ± 5°
LEVELLING horizontal and vertical automatic
LASER RECEPTION RANGE (optional) max. 200 m radius
LASER WAVELENGTH GREEN / RED 532 nm / 650 nm
LASER class 3R, < 5 mW
POWER SUPPLY rechargeable battery for 14 hours alkaline batteries for 8 hours
TEMPERATURE RANGE 0 – 40°C
WATER AND DUST PROTECTION IP 66
WEIGHT 2,6 kg
DIMENSIONS 215 x 205 x 165 mm (W x H x D)





Article-No: 053.00.01A

EAN-Code: 4 021563 670789


Quadrum Green

- including carrying case
- + remote control
- + high-performance battery
- + battery holder
- + mains unit / charger
- + batteries

PU 1

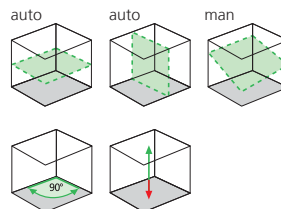

Vertical operating position



Water and dust protection per IP 66



Optional: Waterproof laser receiver

OPTIONAL ACCESSORIES

ARTICLE	ARTICLE-NO	EAN-CODE	PU
Flexi Levelling Staff Green 240 cm	080.51	4 021563 664948	1
SensoLite 310 Set – laser reception range up to 200 m radius – IP 66	028.71	4 021563 663262	1