

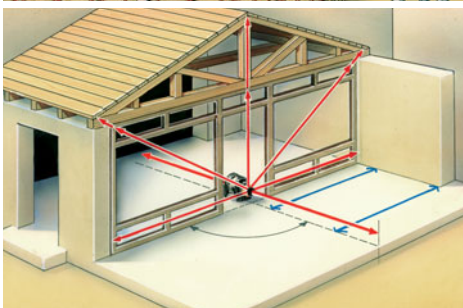


Quadrum 310 S

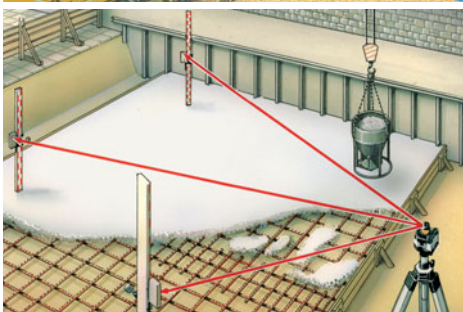

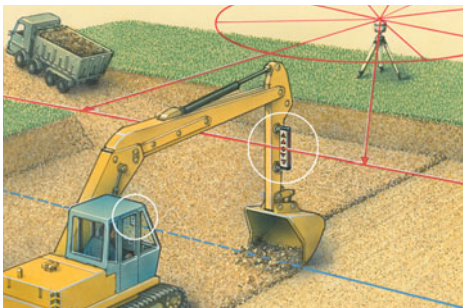


Fully automatic rotary lasers with an extremely durable design.

Rev.0210



- Robust **waterproof** housing.
- **Sensor Automatic:** fully automatic alignment via electronic positioning motors controlled by temperature-stable sensors.
- **ADS tilt:** automatic shutoff by ADS (Anti-drift system) when there is an external disturbance.
- **SpotLite marking:** prevents parallax error and eases exact marking of the reference height.
- A **vertical reference beam** is provided to plumb and align partition walls.
- The additional **red reference beam** makes it easier to plumb and align partition walls.
- The **SensoLite 310** has LC displays on the front and rear sides. Strong holding magnets allow it to be fixed to ferromagnetic objects.
- A **manual slope mode** permits the layout of gradients up to 5 °.
- All of the rotary laser's functions can be controlled with the **remote control** unit.
- The **4 IR receiving diodes** allow this instrument to be remotely operated from all sides.
- **Transport Lock:** a special motor lock protects the unit during the transport.
- **Integrated safe-operating concept.**


TECHNICAL DATA

ACCURACY ± 1 mm / 10 m
SELF-LEVELLING RANGE ± 5°
LEVELLING horizontal and vertical automatic
LASER RECEPTION RANGE max. 300 m Radius
LASER WAVELENGTH 635 - 650 nm
LASER class 3R, < 5 mW
POWER SUPPLY rechargeable battery for 35 hours alkaline batteries for 50 hours
WATER AND DUST PROTECTION Quadrum IP 66, SensoLite 310 IP 66
WEIGHT 2,6 kg
DIMENSIONS 215 x 205 x 165 mm (W x H x D)
  




Article-No: 052.00.07A
EAN-Code: 4 021563 670772

Quadrum 310 S
including carrying case
+ SensoLite 310
+ universal mount
+ remote control
+ high-performance battery
+ battery holder
+ mains unit / charger
+ batteries
PU 1




Vertical operating position



Water and dust protection per IP 66



Waterproof laser receiver



OPTIONAL ACCESSORIES

ARTICLE	ARTICLE-NO	EAN-CODE	PU
Flexi Levelling Staff 240 cm	080.50	4 011879 631147	1
Professional Crank Tripod 260 cm	080.33	4 021563 662296	1