


ZipLevel 25

NEW



Precise altitude measurement – Differences in levels displayed digitally without the need for additional accessories

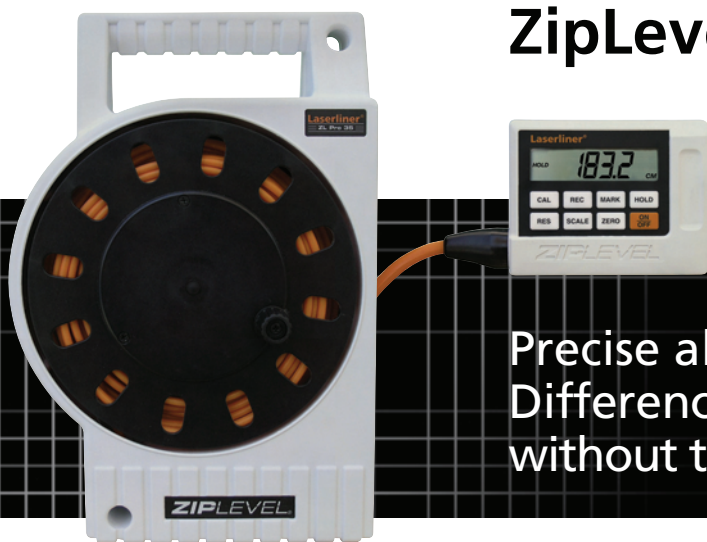

Durable design

Measurement module with large display

1. Easily and quickly measures altitudes without using tools.

2. Large operating range of up to 50 m.

3. Easy to transport: Measuring lead simply winds up and the compact unit can then be moved safely.

– Working temperature from **-30°C to +70°C** by a patented gas-liquid system.

– **Effective** and low-cost, by one-person operation.

– Optimal for rough **field work** and for interior zone too.

– **Constant measuring precision** with a pressurized system up to 50 m: ± 3 mm, temperature and air pressure compensation.

– **Fast measuring times** by a new sensor technology.

– **Auto-Hold and Auto-Zero function** for measurement operations outside field of view (for large heights or deep ditches).

– **Versatile:** Can be adjusted to all surfaces of the measurement module.

– **Auto shut-off function.**

– Stable **measuring lead** with **anti-kink protection**.

– Durable **electronic housing**.

TECHNICAL DATA

MEASUREMENT RANGE

Horizontal ± 25 m
Vertical ± 6 m

OPERATING RANGE

max. 50 m

WORKING TEMPERATURE

-30°C to +70 °C

FUNCTIONS

ZERO – Sets reference level to 0
HOLD – Saves the display
RES – Display tolerance: 2 mm/5 mm/1 cm
MARK – Too high, too low and spot on, signalling tone with adjustable tolerance band
CAL – Can be calibrated by user, and many more

UNITS

mm / cm / m

REFERENCE

Bottom or front of the measurement module, accuracy of 3 mm

POWER SUPPLY

9 V battery bloc

WATER AND DUST PROTECTION

IP 67

WEIGHT

3,5 kg (incl. batteries)

DIMENSIONS

270 x 400 x190 mm (WxHxD)



Article no.: 092.010A

EAN-Code: 4 021563 664917

ZipLevel 25 Pro

+ batteries
+ operating instructions

PU 5

+ Sensing device

OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN-CODE	PU
Sensing device	092.011A	4 021563 664931	1