

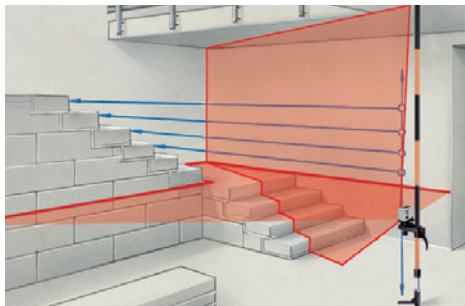


CompactPalm-Laser PowerBright Plus

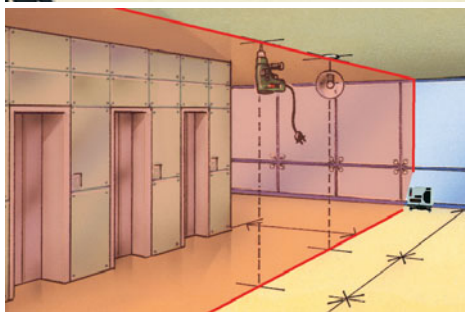

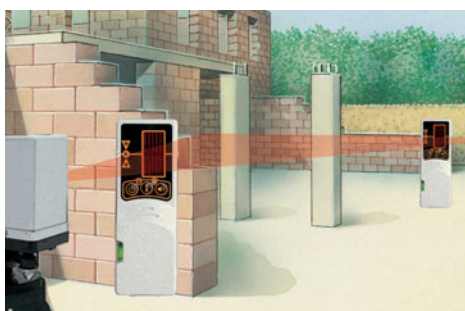


Compact Crossline Laser with
2 extreme bright laser lines.

Rev.1209



- **PowerBright-Plus-Laser:** Special high performance laser diodes generate even brighter laser lines as units with PowerBright Technology do.
- This unit produces **2 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **Individually switchable** laser lines.
- **Out-Off-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX 51 up to a max. of 50 m radius – ideal for all interior and exterior applications.
- The pivoted housing can be turned to permit exact positioning of laser lines.
- **Illuminated vial** and **height-adjustable feet** for preliminary adjustment of the unit.
- **Transport lock:** A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

TECHNICAL DATA

ACCURACY 2 mm per 10 m
SELF-LEVELLING RANGE ± 1,5°
LEVELLING automatic
LASER RECEPTION RANGE (optional) max. 50 m radius
LASER WAVELENGTH 635 nm
LASER line lasers, class 2M, < 5 mW
POWER SUPPLY Batteries 3 x 1,5V AA / approx. 14 hrs
WEIGHT 0,6 kg
DIMENSIONS 110 x 65 x 106 mm (BxHxT)
 




Article-No: 010.001A

EAN-Code: 4 021563 670710

CompactPalm-Laser PowerBright Plus

including soft bag
+ tripod adapter
+ laser enhancement
glasses
+ marking angle
+ batteries

PU 1



Article-No: 010.002A

EAN-Code: 4 021563 670703

CompactPalm-Laser PowerBright Plus RX

Set content like above with-
out laser enh. glasses with
RangeXTender RX
+ universal mount

PU 1




Pivoted housing, 360°

Illuminated vial for
pre-adjustment

Optional:
laser receiver RX

1H 1V



OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN-CODE	PU
Flexi Levelling Staff 240 cm	080.50	4 011879 631147	1
Telescopic Stand Basic, 330 cm	090.120A	4 021563 650637	1