



# Laserliner®

## SensoLite 410 Set



High-performance laser receiver with extremely large receiving range for red and green rotary lasers

Rev.0211

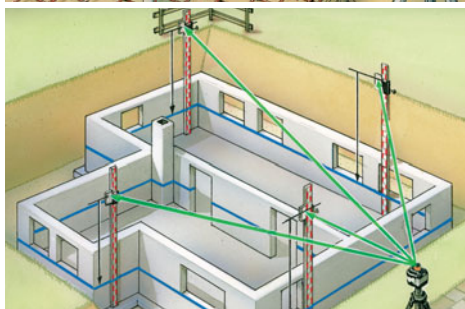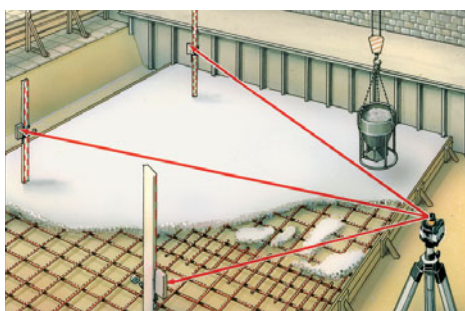

- Extremely **long laser reception range** for quick laser acquisition at great distances
- **LC displays at front and rear.** Melodies indicate the level of the laser beam. Illuminated front LC-Display
- At the front there are **extremely bright 3-colour LEDs** for remote identification as well as an optionally available extremely loud piezo-buzzer
- With **improved universal holder**
- **Height Control:** the device indicates when the laser leaves the reference height
- Strong head and side magnets
- Circular bubble level
- Reception range for red laser up to 400 m
- Reception range for green laser up to 200 m

Available in July 2011.

### TECHNICAL DATA

#### LASER RECEPTION RANGE

1 - 400 m (depends on the rotary laser)

#### LASER WAVELENGTH 522 - 670 nm

#### WATER AND DUST PROTECTION IP 67

#### POWER SUPPLY


1 x 9V block

#### DIMENSIONS (W x H x D)

without universal mount  
76 x 164 x 32 mm

#### WEIGHT

with battery / without universal mount  
0,30 kg

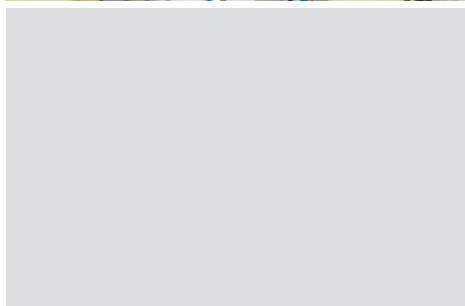

<p>Max. reception range 400 m for red lasers</p>	<p>Max. reception range 200 m for green lasers</p>	<p>Strong head and side magnets</p>	<p>Super bright signal LEDs: High, Low, Target</p>



**SensoLite 410 Set**  
including universal mount  
+ battery

ARTICLE	ARTICLE-NO	EAN-CODE	PU
SensoLite 410 Set	028.75	4 021563 663934	1

