
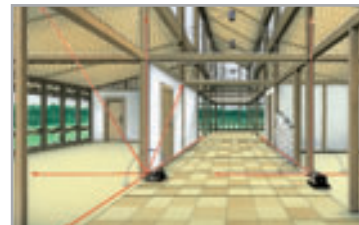
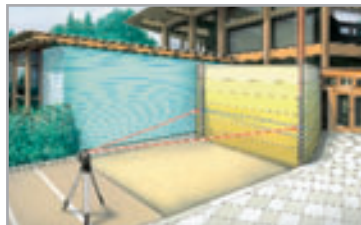
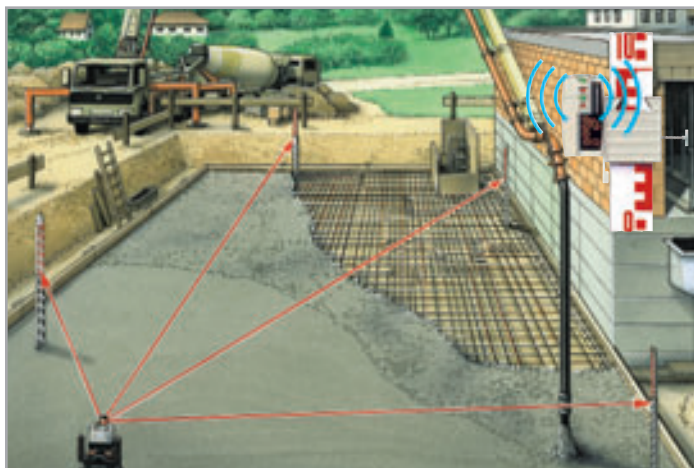


Description

VE

Order No.
(EAN-Code)

Rotary Lasers

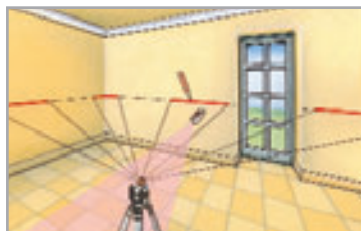

BeamControl-Master

BCM Basic-Plus 120


Rotary laser, precision 2 mm/10 m. A special die-cast-zinc platform guarantees long-term stability. Laser modes: spot, scan, rotary and hand receiver mode. All functions can be controlled remotely. Laser receiver range up to 120 m radius.



1 026.03.00A



PT




Sensocommander 120



Softbag

and Batteries



G



AquaPro 120

Automatic rotary laser with rapid horizontal self-levelling, vertical alignment with adjustable foot. Magnetically-damped pendulum system for 3.5° self-levelling range. Pendulum can be locked for protection during transport. Precision 3 mm/10 m. Laser modes: rotary and hand receiver mode. Laser receiver range up to 120 m radius.



1 046.01.00A



PT



Sensolite 120




Wall/floor base



Softbag

and batteries



AquaPro 210 ⁽¹⁾

Automatic rotary laser with rapid horizontal self-levelling, vertical alignment with adjustable foot. Magnetically-damped pendulum system for 3.5° self-levelling range. Pendulum can be locked for protection during transport. Precision 2 mm/10 m. Laser modes: rotary and hand receiver mode. Laser receiver range up to 200 m radius.



1 046.02.00A



IQ



Sensolite 210



Wall/floor base



High-performance batteries




Mains unit / charger



Set case

and batteries








Description

VE

Order No.
(EAN-Code)

Rotary Lasers

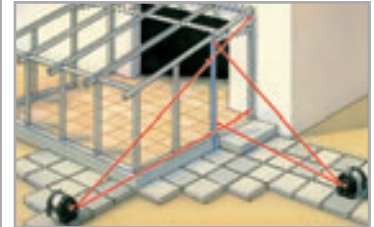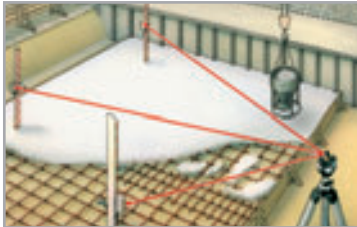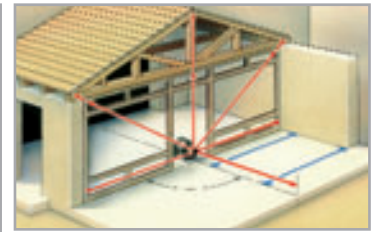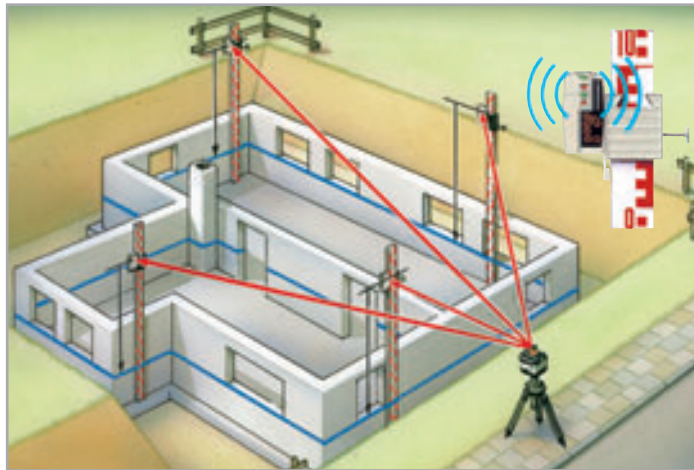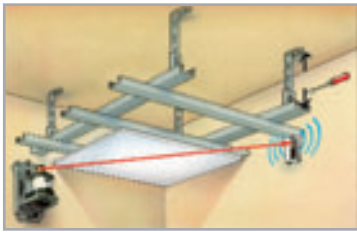

AquaMaster AQM 120


Automatic rotary laser with rapid horizontal self-levelling, vertical alignment with adjustable foot. Magnetically-damped pendulum system for 3.5° self-levelling range. Pendulum can be locked for protection during transport. Precision 2 mm/10 m. Laser modes: spot, scan, rotary and hand receiver mode. Additional 90° reference function for site surveys. All functions can be controlled remotely. Laser receiver range up to 120 m radius.



1 029.03.00A



PT



Universal mount 120



Wall/floor base



Battery compartment



Set case and batteries



AquaMaster AQM Pro 310


Automatic rotary laser with rapid horizontal self-levelling, vertical alignment with adjustable foot. Magnetically-damped pendulum system for 3.5° self-levelling range. Pendulum can be locked for protection during transport. Precision 2 mm/10 m. Laser modes: spot, scan, rotary and hand receiver mode. Additional 90° reference function for site surveys. All functions can be controlled remotely. Laser receiver range up to 300 m radius.



1 029.02.00A



IQ



HIGH SPEED

Universal mount 310



Wall/floor base



Rechargeable battery



Battery compartment



Mains unit / charger



Set case and batteries



AutoControl-Master ACM 310


Automatic rotary laser, 6° self-levelling range, precision 1 mm/10 m. Electronic vials and positioning motors controlled by temperature-stable sensors for automatic alignment. Laser modes: spot, scan, rotary and hand receiver mode. All functions can be controlled remotely. Laser receiver range up to 300 m radius.



1 024.00.08A



IQ



HIGH SPEED

Universal mount 310



High-performance batteries



Charger



Battery holder



Set case and Batteries