


Electronic Spirit Levels and Angle Measuring Devices

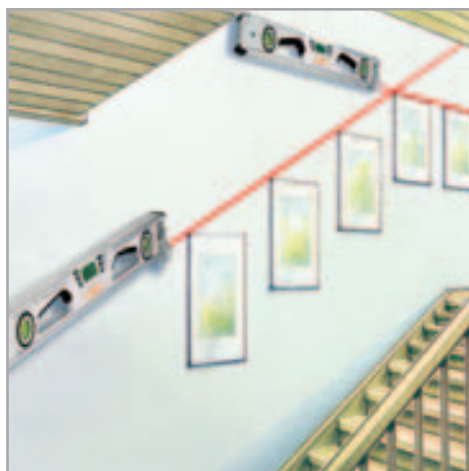

DigiLevel Compact

Digital electronic spirit level with vertical and horizontal angle display. The tilt unit can be toggled between degrees, inches/feet or percent on the numerical display. An acoustic signal sounds to indicate a horizontal or vertical line. Angles can be transmitted in reference mode. Length 23 cm, powerful adhesion magnets and additional vertical and horizontal vial, illuminated display. Accuracy of electronic measurements: $\pm 0.1^\circ$ at 0° and 90° , $\pm 0.2^\circ$ at $1^\circ - 89^\circ$, vial precision ± 0.5 mm / m.

Incl.: softbag and batteries




5

081.202A



PT



DigiLevel 60 cm LCD

Digital electronic spirit level with vertical and horizontal angle display. The tilt unit can be toggled between degrees, inches/feet or percent on the numerical display. An acoustic signal sounds to indicate a horizontal or vertical line. Angles can be transmitted in reference mode and up to 9 values can be retrieved from the separate measured value memory. Milled measuring surface 60 cm in length, powerful adhesion magnets and additional vertical and horizontal vial, illuminated display. Accuracy of electronic measurements: $\pm 0.1^\circ$ at 0° and 90° , $\pm 0.2^\circ$ at $1^\circ - 89^\circ$, vial precision ± 0.5 mm / m.

Incl.: softbag and batteries




5

081.200A



PT



DigiLevel Laser

Digital electronic spirit level with wall-line-laser, vertical and horizontal angle display. The tilt unit can be toggled between degrees, inches/feet or percent on the numerical display. An acoustic signal sounds to indicate a horizontal or vertical line. Angles can be transmitted in reference mode and up to 9 values can be retrieved from the separate measured value memory. Milled measuring surface 60 cm in length, powerful adhesion magnets and additional vertical and horizontal vial, illuminated display. Accuracy of electronic measurements: $\pm 0.1^\circ$ at 0° and 90° , $\pm 0.2^\circ$ at $1^\circ - 89^\circ$, vial precision ± 0.5 mm / m.

Incl.: softbag and batteries




5

081.201A



PT



Description

PU

Order No.
(EAN-Code)

Electronic Spirit Levels and Angle Measuring Devices



Digilevel Pro 30

Digital electronic level with spot laser as an optical extension for point-precise assessment of height and angle. An acoustic signal is sounded at 0°, 45°, 90°, 135° and 180° as an aid to ease the alignment of objects; the flip-display feature changes the display automatically when making overhead measurements. Powerful adhesion magnets on the underside.

Accuracy of electronic measurements: ± 0.05° at 0° – 1°, ± 0.1° at 90°, ± 0.2° at 1° – 89°, vial precision ± 0.5 mm / m.

Incl.: softbag and batteries

5 081.212A



4 021563 664856



Digilevel Pro 60

Digital electronic level with spot laser as an optical extension for point-precise assessment of height and angle. An acoustic signal is sounded at 0°, 45°, 90°, 135° and 180° as an aid to ease the alignment of objects; the flip-display feature changes the display automatically when making overhead measurements. Powerful adhesion magnets on the underside. Accuracy of electronic measurements: ± 0.05° at 0° – 1°, ± 0.1° at 90°, ± 0.2° at 1° – 89°, vial precision ± 0.5 mm / m.

Incl.: softbag and batteries

5 081.210A



4 021563 664825



Digilevel Pro 120

Digital electronic level with spot laser as an optical extension for point-precise assessment of height and angle. An acoustic signal is sounded at 0°, 45°, 90°, 135° and 180° as an aid to ease the alignment of objects; the flip-display feature changes the display automatically when making overhead measurements. Powerful adhesion magnets on the underside.

Accuracy of electronic measurements: ± 0.05° at 0° – 1°, ± 0.1° at 90°, ± 0.2° at 1° – 89°, vial precision ± 0.5 mm / m.

Incl.: softbag and batteries

5 081.216A



4 021563 664849



ArcoMaster 40

Digital electronic angle measuring device with display, arm length 40 cm, measuring range 0° – 220°. Extendable lay-on edge integrated, with additional horizontal and vertical vial. An illuminated LCD display on each side (front and rear), auto hold function, automatic calculation of angle bisection.

Accuracy of electronic angle measurement ± 0.1°, vial precision ± 0.25 mm / 1 m.

Incl.: softbag and batteries

5 075.130A



4 021563 664016



ArcoMaster 60

Digital electronic angle measuring device with display, arm length 60 cm, measuring range 0° – 220°. Extendable lay-on edge integrated, with additional horizontal and vertical vial. An illuminated LCD display on each side (front and rear), auto hold function, automatic calculation of angle bisection.

Accuracy of electronic angle measurement ± 0.1°, vial precision ± 0.25 mm / 1 m.

Incl.: softbag and batteries

5 075.131A



4 021563 666683

