




# Laserliner®

## AutoCross-Laser 3C



A crossline laser with 3 laser lines, additional plumb laser and optional with laser receiver.

Rev. 0209

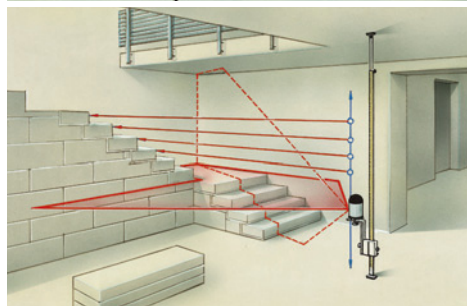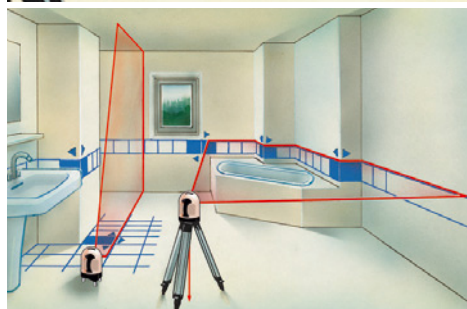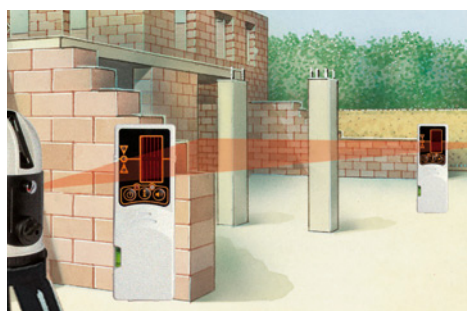

- This unit produces **3 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- The **2 vertical lines** are aligned at right angles to one another.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Individually switchable** laser lines.
- **Out-Off-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX 51 up to a max. of 50 m radius – ideal for all interior and exterior applications.
- The pivoted housing can be turned with a **vernier adjustment mechanism** to permit exact positioning of laser lines.
- **Illuminated spirit level** and **height-adjustable feet** for preliminary adjustment of the unit.
- The **removable rubber caps** on the adjustable feet prevent the device slipping on smooth surfaces.
- **Transport lock:** A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

### TECHNICAL DATA

|   |
|---|
| <b>ACCURACY</b> 2 mm per 10 m   |
| <b>SELF-LEVELLING RANGE</b> ± 3°  |
| <b>LEVELLING</b> automatic  |
| <b>LASER RECEPTION RANGE</b><br>max. 50 m radius                              |
| <b>LASER WAVELENGTH</b> 635 nm  |
| <b>LASER</b><br>line lasers, class 2M, < 5 mW<br>plumb laser, class 2, < 1 mW |
| <b>POWER SUPPLY</b><br>batteries  |
| <b>WEIGHT</b> 1.4 kg  |
| <b>DIMENSIONS</b><br>120 x 190 x 120 mm (WxHxD)                               |
| <b>AUTOMATIC LEVEL</b> (lock) <b>RX READY</b>                                 |



**Article-No: 031.212A**  
EAN-Code: 4 021563 668465

**AutoCross-Laser 3C**  
including carrying case  
+ tripod adapter  
+ PowerPack Fast  
+ batteries

**PU 1**

**Article-No: 031.211A**  
EAN-Code: 4 021563 667062

**AutoCross-Laser 3C RX**  
Set content like above  
including RangeXtender RX  
+ universal mount


**PU 1**



Stable metal base with vernier adjustment




Vial for pre-adjustment



High-quality external Quick-Charger

1H 2V 1D



### OPTIONAL ACCESSORIES

| ARTICLE                        | ARTICLE NO | EAN-CODE        | PU |
|--------------------------------|------------|-----------------|----|
| Flexi Levelling Staff 240 cm   | 080.50     | 4 011879 631147 | 1  |
| Telescopic Stand Basic, 330 cm | 090.120A   | 4 021563 650637 | 1  |