




Laserliner®

AutoCross-Laser 7C PowerBright RX



Robust cross-line laser with 7 super-bright laser lines, plumb laser and laser receiver.

Rev.0709

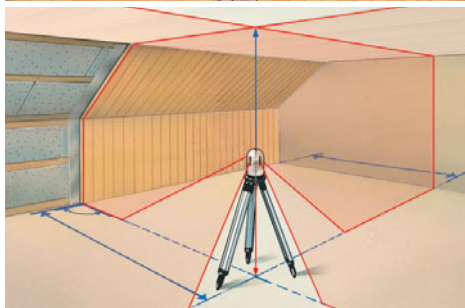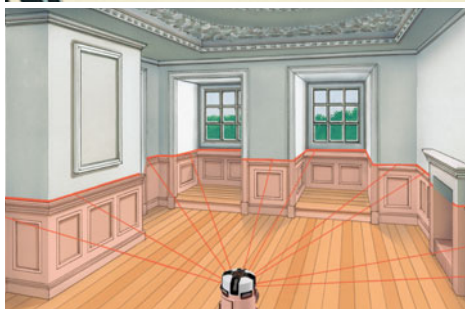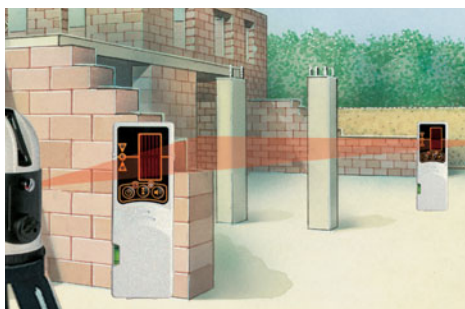

- **PowerBright-Laser:** Special high power diodes produce laser lines double as bright as usual.
- The **3 horizontal laser lines** produce a continuous 360° laser line, the **4 vertical laser lines** are at right angles to one another. Ideal for almost any alignment job.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Individually switchable** laser lines.
- **Out-Off-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX 51 up to a max. of 50 m radius – ideal for all interior and exterior applications.
- The pivoted housing can be turned with a **vernier adjustment mechanism** to permit exact positioning of laser lines.
- **Illuminated spirit level** and **height-adjustable feet** for preliminary adjustment of the unit.
- **Mains operation** possible using additional mains unit.
- **Removable rubber caps.**
- **Transport lock:** A pendulum lock protects unit during transport.
- **Simple, uniform operating techniques.**

TECHNICAL DATA

ACCURACY 2 mm per 10 m

SELF-LEVELLING RANGE ± 3°

LEVELLING automatic

LASER RECEPTION RANGE
max. 50 m radius

LASER WAVELENGTH 635 - 650 nm

LASER
line lasers, class 2M, < 5 mW
plumb laser, class 2, < 1 mW

POWER SUPPLY
batteries / mains operation

WEIGHT 1.4 kg

DIMENSIONS
120 x 195 x 130 mm (WxHxD)




Artikel-No: 049.211A


EAN-Code: 4 021563 669028

**AutoCross-Laser 7C
PowerBright RX**
including carrying case
+ RangeXtender RX
+ universal mount
+ tripod adapter
+ PowerPack Fast
+ batteries


PU 1



Stable metal base with vernier adjustment




Vial for pre-adjustment



High-quality external Quick-Charger

3H 4V 1D



OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN-CODE	PU
Flexi Levelling Staff 240 cm	080.50	4 011879 631147	1
Telescopic Stand Basic, 330 cm	090.120A	4 021563 650637	1