


SuperCross-Laser 2P



The automatic cross-line laser with plumb function and integrated hand-held receiver mode.

Rev.0211

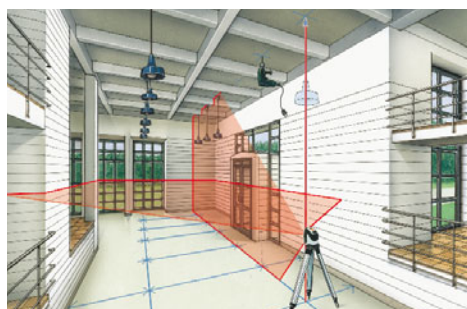

- This unit produces **2 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Additional plumb laser** at top and bottom.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- **RX-Ready:** The integrated hand receiver mode detects the laser lines with the optional laser receiver RX up to a max. of 30 m – ideal for all interior and exterior applications.
- **Individually switchable** laser lines.
- **Additional slope mode** to align angled surfaces.
- **Out-Of-Level:** is indicated by optical signals when the unit is outside its self-levelling range
- **Transport lock:** A pendulum lock protects unit during transport.
- **Multi-functional tripod-/wall mount:** height-adjustable with 1/4" and 5/8" tripod threads, special pins and magnets for various surfaces.
- **Simple, uniform operating techniques.**

TECHNICAL DATA

ACCURACY ± 5 mm / 10 m
SELF-LEVELLING RANGE ± 4°
LASER RECEPTION RANGE (optional) max. 30 m radius
LASER WAVELENGTH 635 nm
LASER CLASS 2 / < 1 mW
WEIGHT 0,43 kg
DIMENSIONS 66 x 119 x 124 mm (BxHxT)




Articel-No: 081.125A

EAN Code: 4 021563 670864

SuperCross-Laser 2P
+ Tripod-/wall mount
+ Softbag
+ Batteries (4 x Typ AA)

Packing dimension (W x H x D)
190 x 315 x 200 mm

PU 5

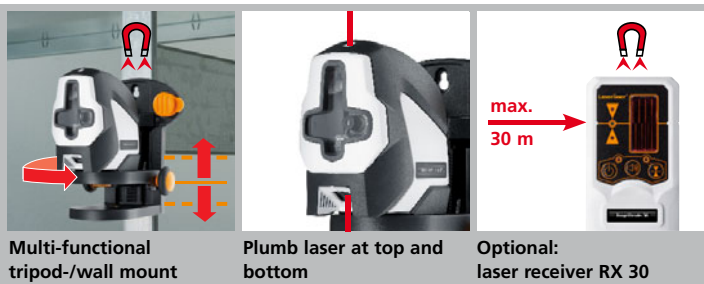


Multi-functional tripod-/wall mount

Plumb laser at top and bottom

Optional: laser receiver RX 30

1H 1V 2P

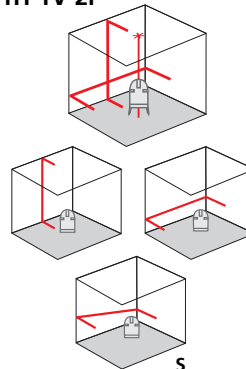

OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN CODE	PU
Laser receiver RX 30 Mag.	033.25A	4 021563 670864	5
Telescopic Stand, 330 cm	090.120A	4 021563 672394	5