




Laserliner®

SuperCross-Green 3



Crossline laser with 3 super-bright laser lines and additional plumb laser.

Rev. 0210

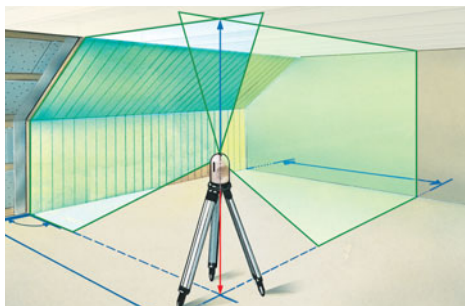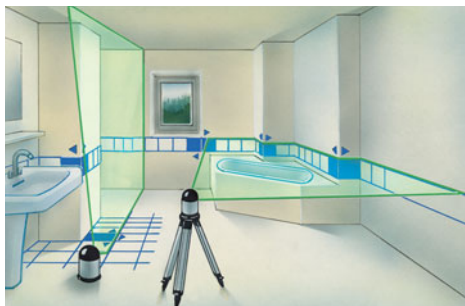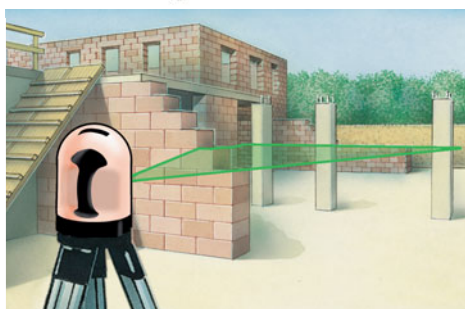


Pivoted housing with vernier adjustment

Vial for pre-adjustment

- **Green laser technology:** because of the physiology of the human eye, green lasers are more visible than red lasers by an order of magnitudes. This makes these lasers easily visible over longer distances and in bright ambient light.
- This unit produces **3 very visible laser lines** which make it outstanding for the alignment of tiles, wall studding, windows, doors, etc.
- **Automatic Level:** automatic alignment by virtue of a magnetic pendulum system.
- The **2 vertical lines** are aligned at right angles to one another.
- A simple, precise plumb function is afforded by the **additional plumb laser** at the bottom and the laser cross at the top.
- **Out-Off-Level:** is indicated by optical signals when the unit is outside its self-levelling range.
- The pivoted housing can be turned with a **vernier adjustment mechanism** to permit exact positioning of laser lines.
- **Additional vial and height-adjustable feet** for pre-adjustment of device.
- **Transport lock:** A pendulum lock protects unit during transport.
- Green laser technology with 0 °C ... 40 °C temperature range.

1H 2V 1D



TECHNICAL DATA

ACCURACY ± 2 mm / 10 m
SELF-LEVELLING RANGE ± 2,5°
LASER WAVELENGTH line lasers (green) 532 – 542 nm plumb laser (red) 650 nm
LASER line lasers, class 3R / < 5 mW plumb laser, class 2 / < 1 mW
POWER SUPPLY 4 x type AA, approx. 2,5 hrs operating time
WORKING RANGE (depending on ambient brightness) 30 m
WORKING TEMPERATURE 0°C ... + 40°C
STORAGE TEMPERATURE -10°C ... + 70°C
WEIGHT 1,2kg



Article-No: 054.000A
EAN-Code: 4 021563 670840

SuperCross-Green 3
including carrying case
+ Laser enhancement glasses
+ magnetic target plate
+ tripod adapter
+ batteries

PU 1

OPTIONAL ACCESSORIES

ARTICLE	ARTICLE NO	EAN-CODE	PU
Telescopic Stand Basic, 330 cm	090.120A	4 021563 665372	1
Crank Tripod 160 cm	080.30	4 011879 630959	1